


6AR LED 6" Adjustable Downlight – Round

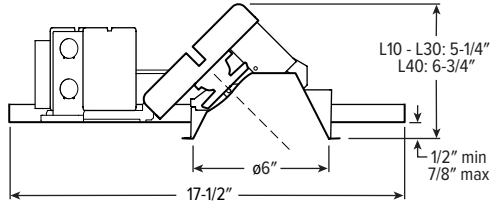

CATALOG #: _____
 TYPE: _____
 PROJECT: _____

NEW CONSTRUCTION AND REMODEL

FEATURES

- Adjustable aim with 0° - 45° tilt and 360° rotation
- Beam angles ranging from 25° narrow to 55° wide for tailored performance
- Spring clip retention system eliminates trim sag
- Etched degree markers and directional indicator make it simple to fine-tune the illumination angle
- Choice of open reflector or die-cast lensed trims to complement interior style
- Contemporary design provides glare-free illumination for a soft ceiling appearance
- Fully room-side accessible

SPECIFICATIONS

- HOUSING** – Die-cast aluminum spun and stamped articulating mechanism with forged aluminum heat sink. Galvanized steel splice compartment with driver mounting plate/enclosure. Mounting clips allow for ceiling thickness from 1/2" - 7/8".
- OPEN REFLECTOR** – Low-iridescent anodized aluminum. Clear semi-specular finish standard.
- LENSED TRIM** – Die-cast aluminum frame with micro-prismatic, acrylic lens.
- ELECTRICAL** – High-performance Class 2 C.O.B. LED array. Modular quick-connect plug for easy field-connection of LED light assembly to driver. Reported L70>55,000 hours. Reported L90>55,000 hours. Estimated L70 = 200,000 hours.
- MOUNTING** – Recessed. 20 ga. galvanized steel mounting pan for new construction or IC-rated enclosure. Remodel kit option includes receiver bracket hardware. N and R mounting types for use in non-fire rated installations only. Minimum 24" O.C. marked spacing required for L30 and L40 lumen packages.
- LISTINGS** –
 - cCSAus conforms to UL STD 1598; Certified to CAN/CSA STD C22.2 No. 250.0 for damp locations. LED light assembly conforms to UL 2108 for remote installation.
 - Suitable for wet location under covered ceiling when specified with WET/CC option.
 - IC-rated for direct contact with insulation when specified with I Mounting Type.
 - City of Chicago Environmental Air approved when specified with CP option.
 - Complies with ASTM-E283 when specified with ATH option.
 - RoHS compliant.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: 6AR - L20/835 - OPTIONS - DIM - UNV - OW - OF - CS - TRIM OPTIONS - N - F1

HOUSING

SERIES	LUMENS ^[1]	CRI	CCT	OPTIONS	CONTROL ^[2]	VOLTAGE
6AR	L10 1,000lm ^[3]	8 80	27 2700K	EM/7W 7-watt emergency battery ^[5]	DIM Dimming driver, 0-10V	UNV 120-277V
	L15 1,500lm	9 90 ^[4]	30 3000K	EM/10W 10-watt emergency battery ^[6]	DIM1 1% Dimming driver, 0-10V	347 347V ^[11]
	L20 2,000lm		35 3500K	EM/10W/RTS 10-watt emergency battery with regressed test switch ^[7]		
	L30 3,000lm		40 4000K	ATH Airtight construction ^[8]		
	L40 4,000lm		50 5000K	CP Chicago plenum (CCEA) ^[9]		
				F Fuse kit		
				SDT Stepdown transformer ^[10]		

TRIM^[12]

TRIM TYPE	DISTRIBUTION ^[13]	FLANGE TYPE	REFLECTOR FINISH	TRIM OPTIONS
O Open reflector	W Wide	OF 1/2" standard flange	Open trim types	MWT Textured white trim flange ^[15]
L Flush lens	55° Open	SF 1/4" mud-in flange ^[14]	CS Clear semi-specular anodize	AD Diffuse acrylic lens ^[16]
A Angled lens	55° Flush		WH White texture powder coat	PD Diffuse 1/8" polycarbonate lens ^[17]
	50° Angled		BL Black texture powder coat	WET/CC Wet location, covered ceiling listed ^[18]
	M Medium		Lens trim types	AM Anti-microbial ^[19]
	35° Open		CS Clear semi-specular powder coat	
	35° Flush		WH White texture powder coat	
	35° Angled		BL Black texture powder coat	
	N Narrow			
	25° Open			
	25° Flush			
	30° Angled			

MOUNTING

MOUNTING TYPE^[20]

- N Open pan for new construction
- I IC-rated enclosure for new construction^[22]
- R Remodel kit^[23]

MOUNTING HARDWARE^[21]

- F1 Factory-installed 2-position fixed pan bracket, universal bar hanger included^[24]
- BA1 Adjustable butterfly pan bracket, bar hanger not included^[25]
- CA1 Adjustable caterpillar pan bracket, universal bar hanger included^[26]

NOTES

- Lumen output based on O trim type, W distribution and CS finish, 3500K/80CRI. Actual lumens may vary +/-5%. See page 2 for FIXTURE PERFORMANCE DATA.
- See page 3 for ADDITIONAL CONTROL OPTIONS.
- Not available with EM/10W emergency batteries.
- Extended lead times may apply. Consult factory for availability.
- N and R Mounting Types only. Not available with ATH option.
- N and R Mounting Types only. Not available with ATH option.
- Not available with WET/CC or ATH options. N and R Mounting Types only. See page 4 for EM/10W/RTS DETAILS.
- I Mounting Type required.
- I Mounting Type required.
- May be required for 347V, see product builder at hew.com/product-builder
- Not available with EM batteries or DMX controls.
- Trim ships separately.
- Beam angle based on CS or WH reflector finish.
- For use with mud-in plaster construction only, supplied with mud flange installation kit. See page 3 for FLANGE TYPE DETAILS. Not available with ATH option.
- Not available with WH Reflector Finish or L Trim Type.
- L and A Trim Types only. W distribution only.
- L and A Trim Types only. W distribution only.

- L Trim Type only. Not available with PD trim option.
- WH and BL Reflector Finishes only.
- Mounting hardware required (N and I only), ordered separately, see MOUNTING HARDWARE ordering info. See page 4 for MOUNTING TYPE DETAILS.
- Additional mounting hardware options available. See page 5 for MOUNTING HARDWARE DETAILS.
- Not available with L40 lumen package.
- Also used in new construction sheetrock ceilings.
- N and I Mounting Types only. Universal bar hanger ships uninstalled. I Mounting requires external brackets.
- N Mounting Type only.
- N Mounting Type only.



6AR LED 6" Adjustable Downlight – Round

FIXTURE PERFORMANCE DATA

OPEN REFLECTOR TRIM TYPE

	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
L10	W	1020	10.5	97.1
	M	1023	10.5	97.4
	N	1022	10.5	97.4
L15	W	1537	15.1	101.8
	M	1542	15.1	102.1
	N	1541	15.1	102.1
L20	W	2039	21.0	97.1
	M	2045	21.0	97.4
	N	2044	21.0	97.3
L30	W	2917	31.3	93.2
	M	2915	31.3	93.1
	N	2790	31.3	89.2
L40	W	3889	42.0	92.6
	M	3886	42.0	92.5
	N	3720	42.0	88.6

FLUSH LENS TRIM TYPE

	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
L10	W	896	10.5	85.3
	M	956	10.5	91.1
	N	951	10.5	90.6
L15	W	1350	15.1	89.4
	M	1442	15.1	95.5
	N	1433	15.1	94.9
L20	W	1791	21.0	85.3
	M	1912	21.0	91.0
	N	1901	21.0	90.5
L30	W	2559	31.3	81.8
	M	2717	31.3	86.8
	N	2609	31.3	83.4
L40	W	3411	42.0	81.2
	M	3622	42.0	86.2
	N	3478	42.0	82.8

ANGLED LENS TRIM TYPE

	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
L10	W	744	10.5	70.9
	M	889	10.5	84.7
	N	907	10.5	86.4
L15	W	1122	15.1	74.3
	M	1340	15.1	88.7
	N	1368	15.1	90.6
L20	W	1488	21.0	70.9
	M	1777	21.0	84.6
	N	1814	21.0	86.4
L30	W	2144	31.3	68.5
	M	2507	31.3	80.1
	N	2441	31.3	78.0
L40	W	2858	42.0	68.0
	M	3342	42.0	79.6
	N	3254	42.0	77.5

MULTIPLIER TABLES

	COLOR TEMPERATURE	
	CCT	CONVERSION FACTOR
80 CRI	2700K	0.92
	3000K	0.98
	3500K	1.00
	4000K	1.01
	5000K	1.02
90 CRI	2700K	0.76
	3000K	0.79
	3500K	0.82
	4000K	0.84
	5000K	0.88


OPEN REFLECTOR FINISH	
CATALOG NUMBER	CONVERSION FACTOR
CS	1.00
WH	0.89
BL	0.79

TRIM	
CATALOG NUMBER	CONVERSION FACTOR
AD ¹	0.85
PD ¹	0.85

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is based on 120V input.
- Results based on 3500K, 80 CRI, 0° tilt, actual lumens may vary +/-5%
- Use multiplier table to calculate additional options.

PHOTOMETRY

6AR-L20/835-DIM-UNV-OW-OF-CS (25° tilt) Report #: 20390; 05/16/18 | Total Luminaire Output: 1958 lumens; 21.2 Watts | Efficacy: 92.5 lm/W | 82.3 CRI; 3571K CCT




CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
		0°	45°	90°	135°	180°	
	0	2605	2605	2605	2605	2605	
	5	3639	3208	2308	1607	1297	227
	15	3810	2844	1321	442	310	469
	25	2919	2543	541	122	92	548
	35	2592	1908	109	26	20	499
	45	1695	212	11	6	6	212
	55	20	2	0	0	2	3
	65	0	0	0	0	0	0
	75	0	0	0	0	0	0
	85	0	0	0	0	0	0
	90	0	0	0	0	0	0

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1244	64
	0 - 40	1743	89
	0 - 60	1958	100
	0 - 90	1958	100
	0 - 180	1958	100



6AR LED 6" Adjustable Downlight – Round

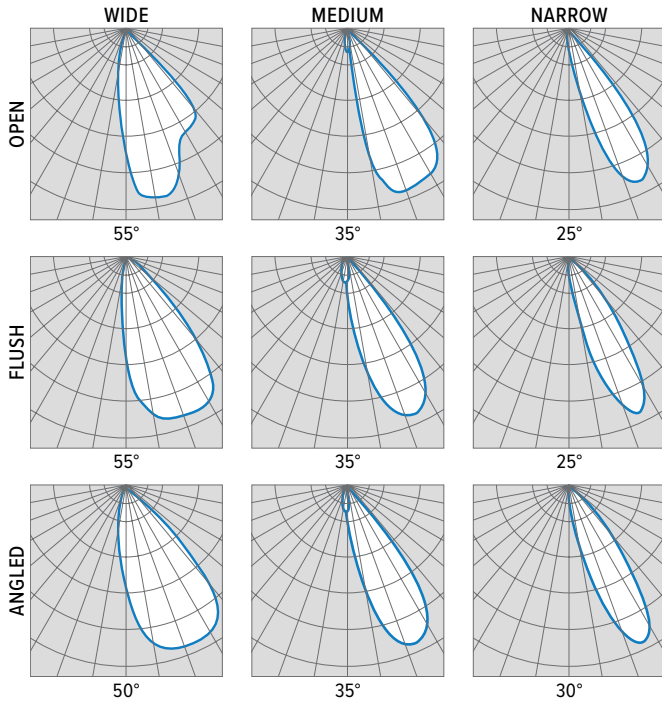


ADDITIONAL CONTROL OPTIONS


Lumen restrictions apply: L30 max for DMX driver, L40 max for Lutron drivers, L40 max for DIM LINE driver. R Mounting Type not available with DMX or FCJS controls. R Mounting Type requires 12" minimum plenum depth when specified with VRF/DBI controls. 347V may require stepdown transformer, see product builder at hew.com/product-builder. I Mounting Type not available with Lutron controls.

CATALOG NUMBER	DESCRIPTION
DIM	Dimming driver prewired for 0-10V low voltage applications
DIM1	1% dimming driver prewired for 0-10V low voltage applications
DIM LINE	Line voltage dimming driver (TRIAC and ELV compatible at 120V only)
DMX	0.1% dimming driver for DMX controls
LTE LINE	Lutron Hi-lume 1% 2-wire dimming driver forward phase line voltage controls (120V only)
LDE1	Lutron Hi-lume 1% EcoSystem dimming LED driver
VRF/DBI/LDE1	Lutron Vive integral fixture control, RF only (DFCSJ-OEM-RF), Lutron Hi-lume 1% EcoSystem dimming LED driver, and digital link interface
FCJS/DIM	Lutron Vive PowPak wireless fixture control with dimming driver
FCJS/DIM1	Lutron Vive PowPak wireless fixture control with 1% dimming driver
ELDO SOLOB	EldoLED Solodrive, 0.1% dimming driver for 0-10V controls
ELDO SOLOB DALI	EldoLED Solodrive, 0.1% dimming driver for DALI controls
ELDO ECO1	EldoLED Ecodrive, 1% dimming driver for 0-10V controls
ELDO ECO1 DALI	EldoLED Ecodrive, 1% dimming driver for DALI controls

TRIM TYPE DETAILS

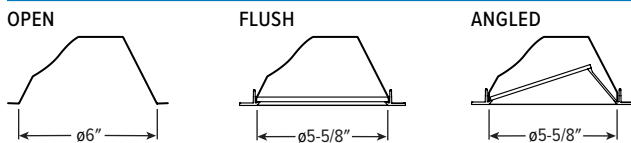

FLANGE TYPE DETAILS

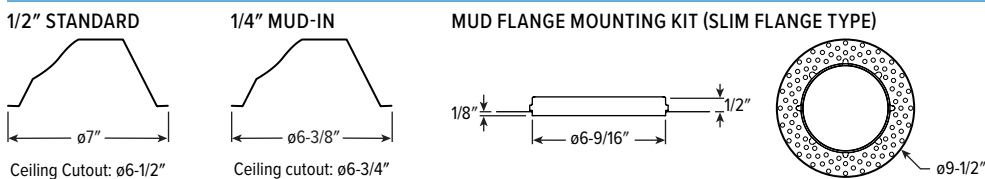


6AR LED

6" Adjustable Downlight – Round


REFLECTOR FINISH DETAILS

CS Clear semi-specular **WH** White **BL** Black




MOUNTING TYPE DETAILS

NEW CONSTRUCTION




IC-RATED

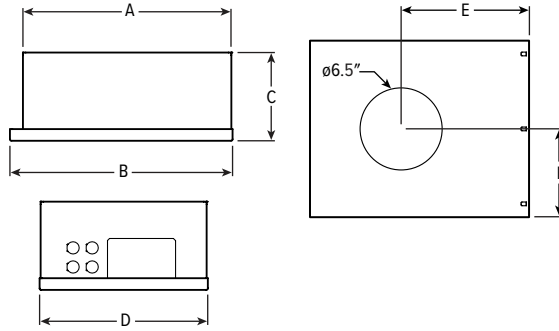


LUMENS	LENGTH					
	A	B	C	D	E	F
L10 - L20	15-3/16"	16"	6-3/8"	12-1/8"	9-1/2"	6-1/16"
L30	16-5/8"	17-1/2"	7-7/8"	14"	10-1/4"	7"


REMODEL




Receiver Bracket

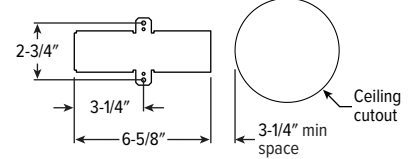


Driver and Junction Box



EM/10W/RTS DETAILS





Shown Installed

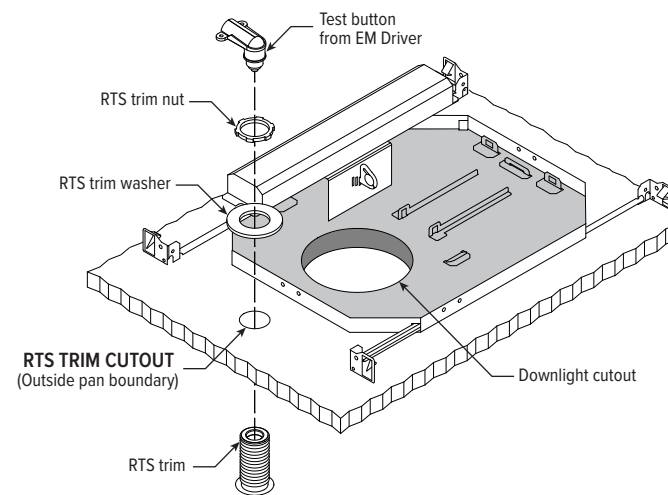

6AR LED 6" Adjustable Downlight – Round


MOUNTING HARDWARE DETAILS

F1 Integral 2-position fixed pan bracket, universal bar hanger included

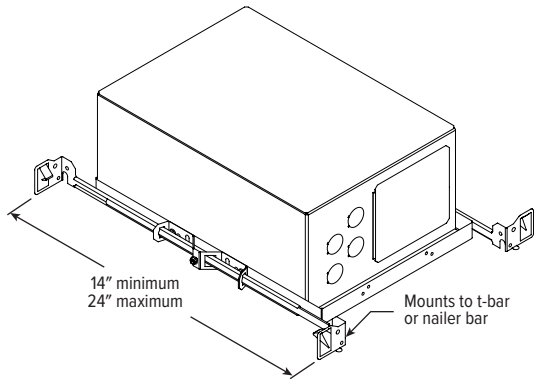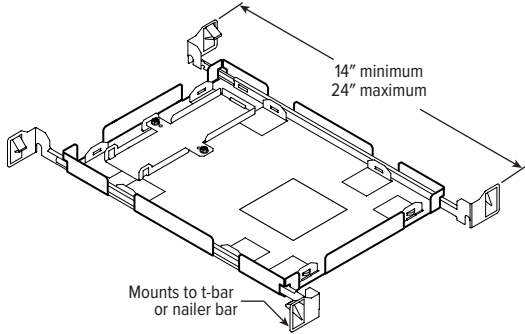


F1 with I Mounting Type


BA1 Adjustable butterfly pan bracket, bar hanger not included (N Mounting Type only)



BA2 Adjustable butterfly pan bracket, heavy-duty universal bar hanger included (N Mounting Type only)

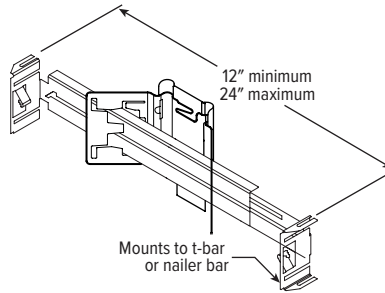

CA1 Adjustable caterpillar pan bracket, universal bar hanger included (N Mounting Type only)

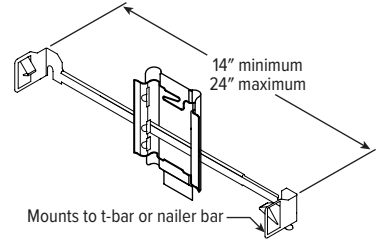

CA2 Adjustable caterpillar pan bracket, t-bar hanger included (N Mounting Type only)

