

CATALOG #: \_\_\_\_\_

Type: \_\_\_\_\_

PROJECT: \_\_\_\_\_

## FEATURES

- Provides 90 minutes of emergency operation
- Ultra-bright, energy-efficient, long-life LEDs
- Remote capable available
- Adjustable heads provide optimal center-to-center spacing
- High-performance reflector and plastic lens for optimal light distribution
- Optional high lumen heads
- Fully automatic solid-state two rate charger recharges battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Self-diagnostic option performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes

## SPECIFICATIONS

- HOUSING** – Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- LAMP HEADS** – Chrome-plated metallized reflector and plastic lens.
- ELECTRICAL** – Dual 120/277 voltage standard. 1.0 watt (8 LEDs x 0.125W) per head. 3.6V long life, maintenance-free, rechargeable NiCd battery. 3W remote capacity when specified with RC option.
- MOUNTING** – Wall or ceiling mount. Knockout for conduit applications. Universal knockout pattern on back plate for surface mount.
- LISTINGS** –
  - UL 924 standard as an emergency light suitable for dry or damp locations (0°C - +50°C).
  - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY** – 5-year limited warranty.

## ORDERING EXAMPLE: EMER/LED - WHT - OPTIONS - D

### ORDERING INFO

SERIES	HOUSING COLOR	OPTIONS	VOLTAGE
EMER/LED	WHT Industry-standard white BLK Black	SDT Self-diagnostic test RC Remote capable PC3 Polycarbonate shield <sup>[1]</sup> WG Wireguard <sup>[2]</sup> HL 1.5-watt high lumen lamp heads	D 120V/277V SV__ Special voltage <sup>[3]</sup>

### REMOTE HEADS: RHL - T - WHT - OPTIONS - MV <sup>[4]</sup>

SERIES	HOUSING	HOUSING COLOR	OPTIONS	VOLTAGE
RHL	Single remote head	T Thermoplastic <sup>[5]</sup>	WHT Industry-standard white <sup>[8]</sup>	SDT For use with self-diagnostic test fixtures <sup>[10]</sup>
DRHL	Dual remote head	D Die-cast <sup>[6]</sup>	BLK Black	HL 1.5-watt remote head, 12 LEDs
WETRHL	Wet location single remote head	P Polycarbonate <sup>[7]</sup>	GRAY Gray <sup>[9]</sup>	
WETDRHL	Wet location dual remote head			

### QUICKSHIP

EMER/LED-WHT-QS-D


## NOTES

- Ships separately. See page 3 for OPTIONS DETAILS.
- Ships separately. See page 3 for OPTIONS DETAILS.
- Not available with SDT. UL Listed for 208/220/240 Volt, 50/60Hz.
- Optional. Ships separately. See page 2 for REMOTE HEAD DETAILS. RC fixture option required.
- RHL and DRHL only.
- WETRHL and WETDRHL only.
- WETRHL and WETDRHL only.
- RHL and DRHL only.
- WETRHL and WETDRHL only.
- Required when fixture is specified with SDT.
- For use with 3.6V, 6V, 9.6V, or 12V DC power source.


# EMER/LED <sup>LED</sup> Emergency Light

## CROSS SECTIONS

FRONT VIEW

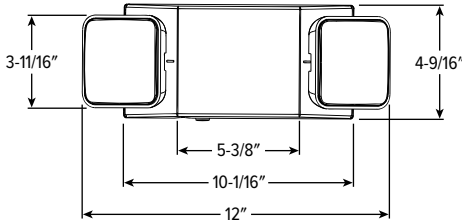


TOP VIEW



## FIXTURE DETAILS

### WALL MOUNT BOLT CIRCLE PATTERN

Not to scale.

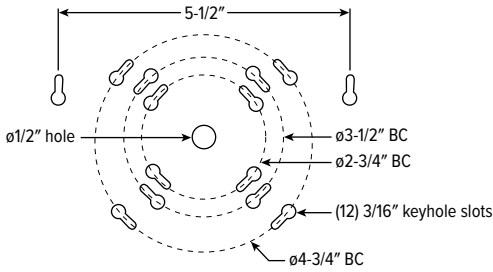

## REMOTE HEAD DETAILS

Ships separately.

RHL



DIMENSIONS: 5-7/8" x 4-7/8"

DRHL



DIMENSIONS: 8-1/2" x 5"

WETRHL



DIMENSIONS: 4-1/2" x 6-5/8"



WETDRHL



DIMENSIONS: 10-3/8" x 6-3/4"

## FOOTPATH

EMER/LED-WHT-HL Meets Life Safety Code: Average illuminance of 1.0 FC with minimum illuminance of 0.1 FC. Reflectance values: 80/50/20. Fixture Mounting Height: 8' AFF

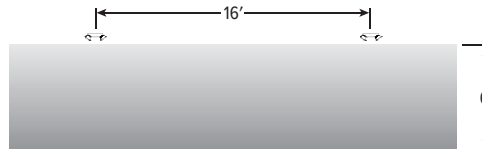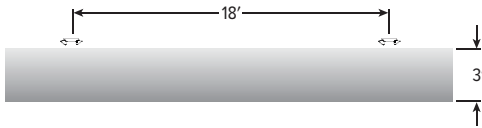

Average: 1.11 | Max: 2.3 | Min: 0.2 | Average min: 5.6 | Max/Min: 11.5

Average: 1.08 | Max: 2.4 | Min: 0.3 | Average min: 3.6 | Max/Min: 8.0

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EMER/LED	1.8	1.8	0.022	0.010
EMER/LED-SDT	1.6	1.6	0.020	0.010

## OPTIONS DETAILS


---

Ships separately.  
PC3



DIMENSIONS: 7-1/2" x 18" x 7"

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"