

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Support human-centric design with adaptive, individualized lighting using tunable white light
- Ambient up/down light with closed top option available
- Fully accessible without the use of tools
- Pull switch and grounded convenience outlet options available
- Optional anti-microbial white finish and pull cord available for use in healthcare applications
- Contoured architectural housing with die-cast aluminum end caps
- Keyhole mounting for easy installation
- Supplied with both Philips and tamper-resistant tri-groove screws for additional security
- Made Right Here® in the USA

SPECIFICATIONS

- **HOUSING** – 20-gauge C.R.S. fixture channel. Front housing constructed of marine grade extruded aluminum with die-cast aluminum end caps.
- **REFLECTIVE SURFACES** – 92% minimum average reflective white polyester powder coat on interior steel components.
- **SHIELDING** – Frosted acrylic, .125" thick.
- **FINISH** – Textured matte white polyester TGIC powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- **ELECTRICAL** – High quality mid-power LED board. L70 > 50,000 hours per IES TM-21. Tunable White products use LEDs of multiple CCTs and may produce a perceptibly different shade of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses.
- **MOUNTING** – Wall.
- **LISTINGS** – cETLus conforms to UL STD 1598 and UL STD 8750. Certified to CAN/CSA STD C22.2 No. 250.0. Suitable for damp locations.
- **WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: WMA - 4 - L64/8TW - AF - OPTIONS - DALI - UNV

ORDERING INFO

SERIES	LENGTH	LUMENS ^[1]	CRI	CCT	SHIELDING
WMA	2 2'	2'	8 80	TW Tunable white (3000K-5000K)	AF Frosted acrylic, .125" thick
	3 3'	L20 2,000lm	9 90 ^[2]	TW2 Tunable white (2700K-6500K)	
	4 4'	L30 3,000lm			
		3'	L23 2,300lm		
		4'	L46 4,600lm		
			L32 3,200lm		
		L64 6,400lm			

OPTIONS ^[3]

- EM/10W** 10-watt emergency battery
- PSBR/120** Single-circuit bottom-mounted pull switch on right ^[5]
- PSBL/120** Single-circuit bottom-mounted pull switch on left ^[6]
- APCW** Anti-microbial white pull cord ^[7]
- GCOL** Grounded convenience outlet on left ^[8]
- GCOR** Grounded convenience outlet on right ^[9]
- LVC1A** 1-circuit low-voltage controller, wired for Ambient ^[10]
- LVC3DIM** 1-circuit dimming low-voltage controller ^[11]
- AMW** Anti-microbial white finish
- (L__)** Additional lower lumen packages available. Example: 5,000 lumens = WMA-4-L64/8TW-(L50) ^[12]
- OCC__** Factory-installed occupancy sensor ^[13]
- OCCWS FS-505-PP-__** Low voltage ultrasonic sensor

CONTROL ^[4]

- DALI** Driver prewired for DALI applications
- DIM** (1) 0-10V signal to control dimming
(1) 0-10V signal to control CCT
- DMX** Driver prewired for DMX applications
- PSQ** Lutron T-Series 2-channel tunable white 1%.

VOLTAGE

- 120** 120V
- 277** 277V
- UNV** 120-277V

ACCESSORIES

- TPTG TOOL** Tamper-resistant tool for tri-groove screws. ^[14]

NOTES

- ¹ Lumen output based on 4000 CCT. Actual lumens may vary +/-5%, see page 2 for FIXTURE PERFORMANCE DATA.
- ² Additional lumen packages available, see Options.
- ³ Extended lead times may apply. Consult factory for availability.
- ⁴ See page 3 for FINISH OPTIONS.
- ⁵ See page 3 for CONTROL DETAILS.
- ⁶ 120V only.
- ⁷ 120V only.
- ⁸ Packaged with fixture, field installed. Requires PSBR or PSBL option.
- ⁹ 120V only.
- ¹⁰ 120V only.
- ¹¹ 120V or 277V only. Not dimming compatible. Color tuning performed by alternate 0-10V control source. LVC wall plate accessories available, see hew.com for details.
- ¹² 120V or 277V only. DIM driver only. Bedside switch used to control dimming only, color tuning performed by alternate 0-10V control source. LVC wall plate accessories available, see hew.com for details.
- ¹³ Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
- ¹⁴ 120V or 277V only, must specify voltage. LVC and OCC options cannot be used simultaneously on 2' and 3' units. See page 2 for FIXTURE DETAILS.
- ¹⁵ Tamper-resistant tool must be ordered separately for use with tamper-resistant screws. Please specify quantity required per project.



FIXTURE PERFORMANCE DATA

	LED PACKAGE	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
2'	L20	2065	16.8	122.7
	L30	3126	26.2	119.5
3'	L23	2386	19.2	124.2
	L46	4723	39.1	120.8
4'	L32	3318	26.8	123.6
	L64	6511	54.7	119.0


- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is average for 120V through 277V input.
- Results based on 4000K, 80 CRI, actual lumens may vary +/-5%
- Use multiplier table to calculate additional options.

MULTIPLIER TABLE


		COLOR TEMPERATURE			
		TW		TW2	
CCT	80 CRI	LUMENS	WATTAGE	LUMENS	WATTAGE
		2700K	-	-	0.93
3000K	0.95	1.04	0.95	1.01	
3500K	0.98	1.02	0.98	1.00	
4000K	1.00	1.00	1.00	1.00	
5000K	0.96	1.04	1.02	1.00	
6500K	-	-	1.01	1.04	

CCT	90 CRI	LUMENS	WATTAGE	LUMENS	WATTAGE
		2700K	-	-	0.93
3000K	0.91	1.03	0.95	1.01	
3500K	0.96	1.01	0.98	1.00	
4000K	1.00	1.00	1.00	1.00	
5000K	1.03	1.03	1.03	1.00	
6500K	-	-	1.02	1.04	

TW




TW2



PHOTOMETRY

WMA-4-L64/8TW-AF Total Luminaire Output: 6511 lumens; 54.7 Watts | Efficacy: 119.0 lm/W | 84.2 CRI; 4025K CCT

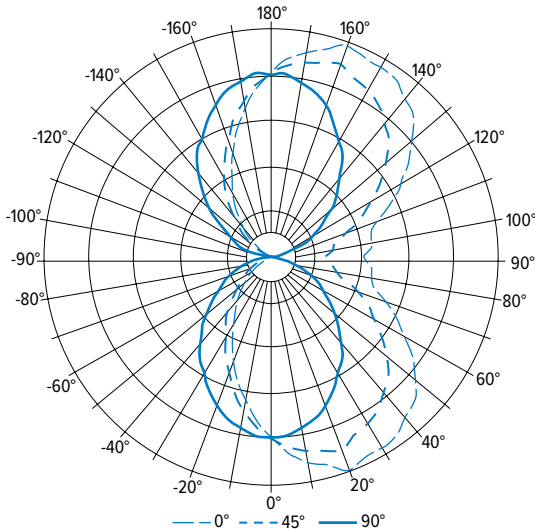


VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	1166	1166	1166	1166	1166	
5	1273	1233	1159	1105	1070	110
15	1384	1289	1083	912	838	310
25	1427	1273	952	697	598	454
35	1410	1210	806	510	405	532
45	1313	1077	619	320	228	535
55	1105	869	443	176	101	470
65	890	675	290	67	18	368
75	681	452	145	5	9	260
85	656	394	33	17	33	214
90	598	361	0	31	46	
95	652	397	35	24	39	216
105	677	458	147	5	9	261
115	884	679	291	64	16	367
125	1096	875	451	179	101	470
135	1296	1077	624	320	228	535
145	1398	1210	820	513	408	533
155	1416	1271	964	700	601	455
165	1380	1290	1099	914	842	311
175	1271	1235	1178	1111	1077	111
180	1169	1169	1169	1169	1169	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	874	13
0 - 40	1407	22	
0 - 60	2411	37	
0 - 90	3253	50	
90 - 120	844	13	
90 - 150	2382	37	
90 - 180	3258	50	
0 - 180	6511	100	

FIXTURE DETAILS

BACKVIEW

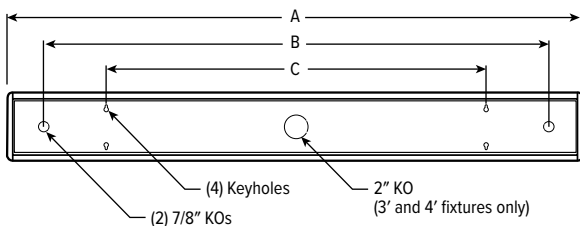


	DIMENSIONS		
	A	B	C
2'	25-1/8" O.C.	20-1/2" O.C.	16" O.C.
3'	37-1/8" O.C.	32-1/2" O.C.	32" O.C.
4'	49-1/8" O.C.	42-1/2" O.C.	32" O.C.


OCCUPANCY SENSOR



CONTROL DETAILS



FINISH OPTIONS

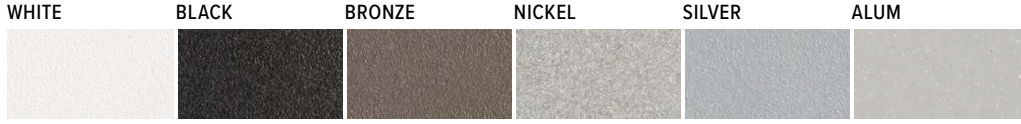

For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require two sample swatches, minimum 1" square.