



# WALL STATION

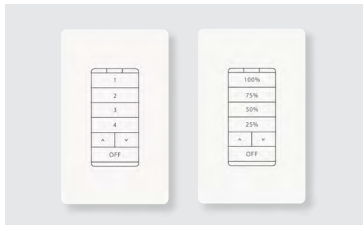

CATALOG #: \_\_\_\_\_

Type: \_\_\_\_\_

PROJECT: \_\_\_\_\_

## ORDERING EXAMPLE: AVI-2401AC

- AVI-2401AC** Wall buttons numbered 1-4, up/down, and off, powered by Avi-on, 120-277VAC
- AVI-2402BAT** Wall buttons numbered 1-4, up/down, and off, powered by Avi-on, battery powered (batteries included)
- AVI-2401AC-2** Wall buttons with percentages, up/down, and off, powered by Avi-on, 120-277VAC
- AVI-2402BAT-2** Wall buttons with percentages, up/down, and off, powered by Avi-on, battery powered (batteries included)

### FEATURES

- Local control of lights in a specific zone with wireless mesh connection
- Programmable via wireless mesh enabled app or functions as a manual dimmer
- Easy-to-change grouping, scheduling, timers and scenes
- Capable of multi-gangging and compatible with Decora-style faceplates, included.

### SYSTEM REQUIREMENTS

- Williams fixtures with Avi-on wireless control
- Desktop & mobile apps


### SPECIFICATIONS

- FINISH – White
- ELECTRICAL – 120-277 VAC, 50/60Hz input voltage or 10+ year battery
- MOUNTING – Standard wall box
- ENVIRONMENT – Indoor use only. 0°C to 40°C
- LISTINGS – The Avi-on Lighting Control Platform is a DesignLights Consortium® NCL qualified product.




## DETAILS

### SIDE VIEW

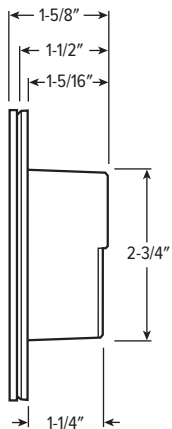

### WIRING DIAGRAM



### WARNING

- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- For use with -UNV version.
- Make sure all electrical power is turned off while installing the wall station.
- This wall station must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing.